

## e-straight




<b>STEEL QUALITY</b>	EN 10025-2:2004 - S235JR, cold drawn NBN A 24-302 - BE 500 TS
<b>MATERIAL THICKNESS</b>	2 x 5 mm (13/64") upper steel plates Body 1,5 mm (1/16")
<b>PROFILE LENGTH</b>	2,60 m (+ 5 mm / - 10 mm) (8.53 ft +13/64" / - 25/64")
<b>JOINT OPENNING</b>	Optimal and recommended up to 15 mm (19/32"), load transfer possible up to 25 mm (1")
<b>ANCHORAGE</b>	Patented, especially 3D formed rebar $\varnothing$ 6 mm (15/64") as continuous anchorage
<b>VERSIONS</b>	Natural steel / Galvanized
<b>PALLET SIZE</b>	Length 2,60 m (8.53 ft), Width 1,15 m (3.77 ft), height see table

Height a [mm] (inch)	Slab thickness [mm] (inch)	b [mm] (inch)	Weight [kg/m] (lbs/ft)	Weight [kg/pc.] (lbs/pc.)	Quantity [pcs./pal.]	Quantity [m/pal.] (ft/pal.)	Gross weight per pal. [kg] (lbs)	Pallet Height [m] (ft)
130 (5 1/8)	140 - 150 (5 33/64 - 5 29/32)	30 (1 3/16)	7,37 (4.95)	19,15 (42.22)	7 x 8 = <b>56</b>	145,6 (477.69)	1150 (2535)	1,15 (3.77)
155 (6 7/64)	160 - 180 (6 19/64 - 7 3/32)	65 (2 9/16)	7,78 (5.23)	20,22 (44.58)	7 x 7 = <b>49</b>	127,4 (417.98)	1070 (2360)	1,26 (4.13)
180 (7 3/32)	190 - 200 (7 31/64 - 7 7/8)	90 (3 35/64)	8,07 (5.43)	20,99 (46.28)	7 x 6 = <b>42</b>	109,2 (358.27)	960 (2115)	1,20 (3.94)
205 (8 1/16)	210 - 230 (8 1/4 - 9 1/16)	115 (4 17/32)	8,37 (5.62)	21,76 (47.97)	6 x 7 = <b>42*</b>	109,2 (358.27)	990 (2180)	1,35 (4.43)
230 (9 1/16)	240 - 250 (9 29/64 - 9 27/32)	140 (5 33/64)	8,56 (5.75)	22,26 (49.08)	6 x 7 = <b>42*</b>	109,2 (358.27)	1010 (2227)	1,50 (4.92)

\*The pallets of e-straight 205, e-straight 230 and other custom heights above 180 mm are not stackable for transport!

The e-straight joint is recommended for the use in light and medium loaded floors and for floor thickness' between 140 and 250 mm (5.5" - 10").

**ATTENTION:** Straight joints do not withstand forklift traffic with hard wheels! The load transfer capacity of e-slide® is reduced when compared to Cosinus Slide® but is still considerably greater than discontinued plate- or doweled joints. For calculations, validations and optimal use of the joints for your respective projects, please contact your local dealer or send a request to [info@hcjoints.be](mailto:info@hcjoints.be).

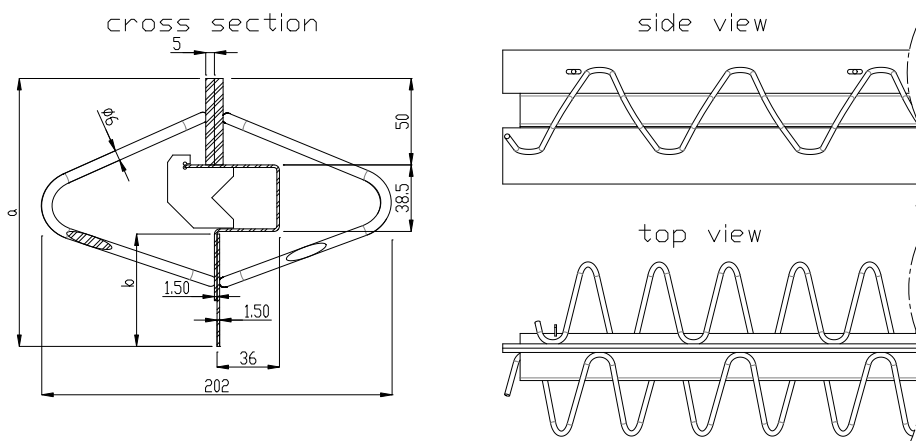

Document issued August 2024. Hengelhoeof Concrete Joints nv. reserves the right to alter the products without notice.

©COPYRIGHT 2024 by Hengelhoeof Concrete Joints nv.



**HENGELHOEF**  
CONCRETE JOINTS

Hengelhoeofstraat 158, Poort Genk 0420, B-3600 Genk  
T. +32 (0)89 32 39 80 · F. +32 (0)89 32 39 88  
E. [info@hcjoints.be](mailto:info@hcjoints.be)

[www.hcjoints.be](http://www.hcjoints.be)